
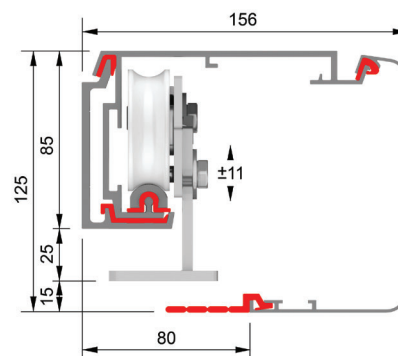


SLIDING DOOR SL5

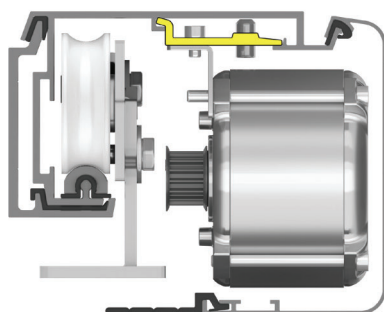

SILENT

The configuration with three gaskets, together with the brushless motor in direct drive, makes **SL5** absolutely silent.

EASY MAINTENANCE

The configuration without motor-gear makes **SL5** extremely reliable and with high performances, minimizing the need of maintenance. The brushless motor is covered by a 5-year warranty and the automation is tested for 5 million cycles.

EASY TO INSTALL

All the maintenance and installation activities are extremely easy, thanks to the profile configuration and to the hooking system for the rail profile and for all the components.

	ADVANCED EMERGENCY	HEAVY
Dimensions (mm):	125 x 156 x 6600	
Max load (kg):	1 leaf:140 2 leaves:120	1 leaf: 180 2 leaves:150
Max speed (m/s):	1 leaf:0.8 2 leaves:1.6	1 leaf:0.6 2 leaves:1.2
Service class	continuous operation	intense operation
Power supply:	100 - 240 V 50/60 Hz	
Power (W)	70	
Stand-by (W)	10	
Rated load (N)	150	
Degree of protection	IP20	
Operating temperature (°C)	-15 / +50	
Accessory output	12 Vdc (1 A max)	
Firmware update	USB standard / Micro SD	

SL5 automation is a reference on the market for its silence thanks to the 3-gasket system that absorbs noise and vibrations. It also achieves the maximum level of energy efficiency through the use of the brushless motor in direct drive and to the switch mode technology.

The profiles system, the hooking system for the internal components and the integrated display make the installation very simple and easy.

SL5 is available as **ADVANCED** or as **EMERGENCY** in redundant configuration or in the **HEAVY** version for leaves up to 180 kg.

